

Sc 250


Slimline Cassette Awning



0845 6802842

sales@sunawnings.direct
www.sunawnings.direct

Sc 250

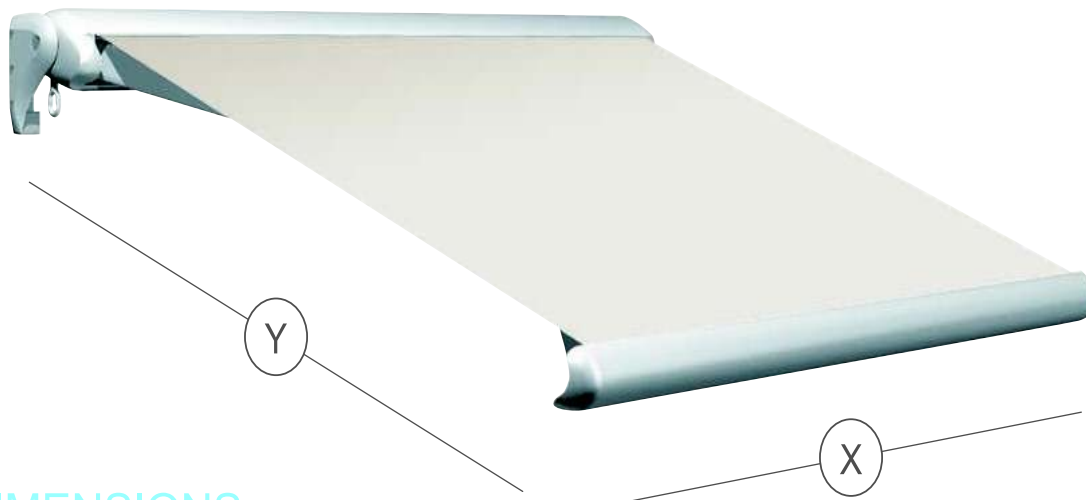

DIMENSIONS

(X) Width
cm 240 - 540

(Y) Projection
cm 150 - 300

STRUCTURAL FEATURES

EN Retractable arm awnings in a compact box with hermetic closing. Versatile installation with four different possibilities: compact or slim, both mounted on the ceiling or wall (page 19). Efficacious and convenient micrometric slope regulation during the roller box installation and therefore of the extended awning. Depending on the type of assembly and control, the slope can be regulated from 0 to 90 degrees.

The box with hermetic closure that completely holds the awning and the arms inside it have the role of protecting it from bad weather, preserving the awning over time. Structure entirely powder-painted, stainless steel bolts and nuts, all to give the best resistance.

Manual or automatic rolling system (page 20). Class 2 wind resistance in compliance with the UNI EN 13561 European standard.

EN Motorizations and automatisms guaranteed by the excellence of our partner Somfy. The motors are practically invisible, inserted in the roller tube, with variable power depending on the awning dimensions. The automatisms move the awning for greater comfort in total safety. The SOLIRIS sensor detects sun intensity and the retractable arm awning opens or closes in an independent and intelligent way. Without considering passing clouds. When the wind is detected by the EOLIS sensor the awning automatically retracts. The control system constantly monitors the wind force and consequently manages winding the awning, protecting it even when you are not there.



1. Brackets Reversible external lateral brackets, which quickly fasten to the counterplate mounted on the wall or ceiling. Compact or slim.

2. Hermetic closing Retractable arm awning in compact box with hermetic closing to protect the awning 100%.

3. Joint Arms with nickel-plated steel catena flyer chain. Movement on self-lubricating bushings.



TELIS PATIO



TELIS ATRIO



SOLIRIS



EOLIS


INSTALLATION

EN The Sc 250 model permits four different installations: COMPACT or SLIM, both for either ceiling or wall mounting. The whole of these combinations give this awning the versatility to adapt to any


mounting need.

Sc 250 COMPACT VERSION

Wall mount




Ceiling mount




Sc 250 SLIM VERSION

Wall mount




Ceiling mount



AWNING SLOPES

Sc 250

EN Micrometric regulation of box slope. From 0° to 90°.

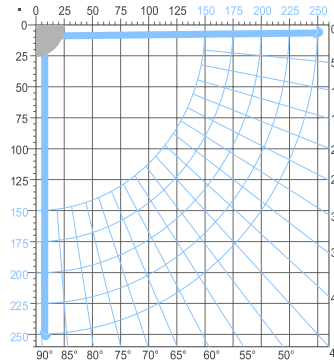

Body Colours

EN The aluminum used undergoes a process of chromating that better fixes the paint to the surface, that has to be previously cleaned, slowing the attack of atmospheric agents and salt spray fog. The powder-based paint increases protection against corrosion and aggressive agents, and has high mechanical characteristics.

Ivory
RAL 1013



VR light stainless steel



Anthracite
VIV 416



Brown
RAL 8017



Gray
RAL 7035



Green
RAL 6005



Black
RAL 9005



White
RAL 9010



Optional Pelmet

The Pelmet or valance is 250mm deep to the bottom of the design



