

Med Room System



Med Room

Side Screens


Structural



Self-supporting autonomous modular structure, with strong PVC anti UV ray Plana cloth. Folded cloth awning supported by windbreaker bars, measuring 43 x 65 mm, and strong end bar, measuring 85 x 65 mm, running on guides 60 x 100 mm. Windbreaker, terminal bars and guides in coated aluminium. None of the sophisticated movement technology or awning support and assembly details are on view, thanks to the smart frame (54 cm high), which is more compact than the Med Room Fly. The awning slope permits lateral water drainage, through guttering inside the frame to the ground, through openings at the bottom of the supporting posts. The awning is motorised by SOMFY systems. The structure is possible with 4 or 6 supporting posts, measuring 150 x 150 mm, to cover an area up to 50 square meters. On request, a guard is available incorporated in the frame, to protect the awning when it is closed.

Dimensions

(X) Width	(Y) Projection	(Z) Height
Up to 500 cm	Up to 600 cm (4 posts) Up to 1000 cm (6 posts)	240 cm under beam 54 cm frame

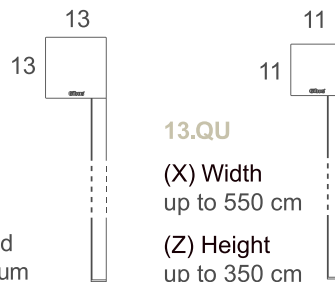

13.QU

(X) Width
up to 550 cm
(Z) Height
up to 350 cm

Dimensions


11.QU

(X) Width
up to 400 cm
(Z) Height
up to 270 cm




Layout

4 posts



6 posts

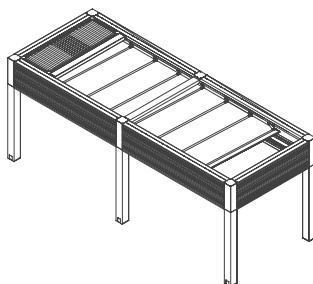

1. EN plana cloth Folded cloth awning supported by windbreaker bars, sliding on painted aluminium guides. Patented opening and closing system, to perfectly stretch the awning when it is open and position it correctly when it is closed.



1



2

2 water drainage The openings at the bottom of the posts permit the rainwater to drain away.

According to the protection needs, the drop awning models can be chosen. square-section cassette that discreetly integrates with all the products in the Med Room line.

Awning in self-supporting cassette with vertical drop, equipped with guides including ZIP system with spring and Smart Guide snap fastening system (patent pending) in order to close any type of masonry area for excellent protection from wind and rain. The cassette can be mounted on the ceiling by means of the innovative support with Smart Cover fast coupling (patent pending), or by merely fastening the heads directly on the parapet.

Available in blackout, shading, Cristal and screen solutions. They can all be motorized, painted aluminum structure, entirely powder-coated, with stainless steel bolts and screws.

Options


OPTIONAL FEATURES



1. EN lighting There are three lighting solutions for the Plana awning: led lights integrated in the intermediate profiles with rectangular spotlights, led lights that can be put on the outside, even after the awning has been installed and the Raya led bar that can be installed in any moment

2. EN windbreak windows Can be fitted on all the Med Room models. A smart optional to enjoy the new Stanza del Sole® all

EN Med Room is the Stanza del Sole® that allows you to live your most beautiful moments in total freedom outdoors, day and night, thanks to the Gibus lighting systems. Integration with Somfy IO-Homecontrol® or RTS is foreseen. The latter permits adjusting light intensity with a dimmer. The system is complete with power feed boxes with wires to connect to the home network. DE Med Room ist das Pavillon Stanza del Sole®, mit dem Sie dank der Beleuchtung von Gibus völlig ungestört ihre schönen Augenblicke an der frischen Luft bis in den späten Abend genießen können. Serienmäßig mit IO-Homecontrol® von Somfy oder mit RTS Funkfernbedienung, die auch eine Regulierung der Lichtstärke mit einem Dimmer erlaubt. Vervollständigt wird das System mit den Anschlussdosen mit Kabeln für den Anschluss an das Stromnetz.

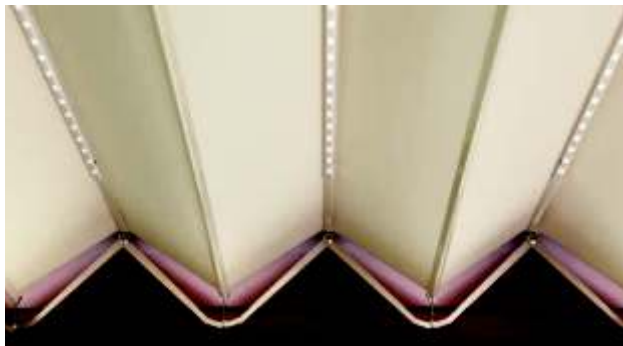

EN Led Linear applied outside the windbreak bar (see pages 5), formed of a preassembled outdoor bar, applied by clips beneath the windbreak bar. Comprises 12 led/m, with 6 watt/m output, and lengths of 100/200/300 cm. The Linear Led can also be installed after the structure in the Plana, Fly and Maki cloth systems.



EN Led Spot integrated in the windbreak bar with the bar incorporated in the windbreak bar, with groups of 6 leds every 50 cm: Rectangular led spots formed of groups of 6 0,5 W leds, for a total of 3 w/spot. Uses around 1/2 of the light given by the 6 leds. The Led Spotlights can only be installed in the Plana and Maki cloth systems.



EN The Raya Led Bar in aluminum with opal diffuser can be installed on the wall or the internal part of the structure. Neutral light with an adjustable intensity thanks to the dimmer. Color temperature 4000°K, length up to 4 m with 100-Watt power feed, over and up to 6 m with 200-Watt power feed. Standard white paint, other colors upon request. Raya Led Bar can be installed at any moment, regardless of the cloth used.

Colour Options

Motorisation

PAINTING

EN The aluminium is treated beforehand and the surface cleaned so that the paint adheres better, slowing down attack from pollution, the weather and saline mist. The powder painting on the aluminium has high mechanical properties and increases protection against corrosion and aggressive atmospheres.

RANGE OF AWNING COLOURS

White/White 	Anthracite Gray/Champagne 	Champagne/Champagne 	In production White RAL 9010 	Charcoal VIV 416 	Upon request Ivory ral 1013 	VR light stainless I 	corten/corten 	Bronze 	Brown RAL 8017 
Burgundy/Champagne 	Gray/Champagne 	Green/Champagne 							

MOTORISATION

EN Motorizations and automatism guaranteed by the excellence of our partner Somfy. The motors are practically invisible, inserted in the winding roller, with variable power depending on the awning dimensions. The automatism move the awning for greater comfort in total safety. The SOLIRIS sensor detects sun intensity and awning opens or closes in an independent and intelligent way. Without considering passing clouds. When the wind is detected by the EOLIS sensor the awning automatically retracts. The control system constantly monitors the wind force and consequently manages winding the awning, protecting it even when you are not there.



io-homecontrol
remote control



telis patio
remote control



telis atrio
remote control



soliris
sensor



eolis
sensor



0845 6802842
sales@sunawnings.direct
www.sunawnings.direct